



KITZ Corporation Of America
800-772-0073 • www.KITZ.com

Design - B16.34, OS&Y, BB, RFF, Swivel Type Plug Disc, LEV - 100 PPM max.
Body Materials - ASTM A351, A494, A890, A990, others upon request



Class 600

GLOBE VALVE


Pressure-Temperature Rating: ASME B 16.34

600UPA

600UPAM

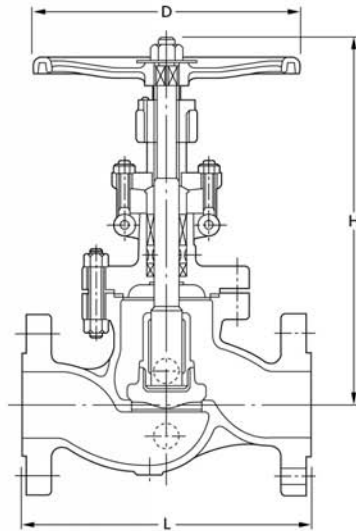

1/2 and smaller



Hammer-blow Type Handwheel
Standard for Nominal Size 3 & larger



Materials

Parts	600UPA	600UPAM
Body	CF8	CF8M
Bonnet	CF8	CF8M
Stem	304	316
Disc*	1/2 to 1 1/2 2 to 8	304 CF8M
Gland	304	316
Gland flange	CF8	
Gland packing	Refer to Page 10	
Gasket	Refer to Page 10	
Yoke bush	Ductile Ni-resist	
Handwheel	Ductile iron	
Gland bolt/nut	B8/8	
Bonnet bolt/nut	B8/8	
Collar**	304	316
Gland bolt pin	403	
Name plate	Aluminum	

*Body seats and/or disc seats can be optionally hard-faced.

**Size 2 and larger.

Hammer-blow type handwheel
for size 3 and larger

Items	
Face-to-Face Dimensions	ASME B16.10
End Flange Dimensions	ASME B16.5
Wall Thickness	ASME B16.34 Class 600

Nominal Size		1/2	3/4	1	1 1/2	2	2 1/2	3	4	6	8
L	in.	6.50	7.50	8.50	9.50	11.50	13.00	14.00	17.00	22.00	26.00
	mm	165	190	216	241	292	330	356	432	559	660
H (open)	in.	8.0	8.3	9.6	11.1	14.6	17.4	19.3	23.0	29.2	34.5
	mm	203	210	245	282	372	441	490	584	742	877
D	in.	4.7	4.7	6.3	7.9	8.9	9.8	13.8	15.8	23.6	23.6
	mm	120	120	160	200	225	250	350	400	600	600

